



DP/GP40N - DP/GP45N - DP/GP50CN DP/GP50N - DP/GP55N

Specifications

Engine powered lift trucks


4.0 - 5.5 tonnes

Cat® Lift Trucks.

Your partner in materials handling.

Mast Performance and Capacity

- h1 Height with mast lowered
- h2 Standard free lift
- h3 Lift height
- h4 Height with mast raised
- h5 Full free lift
- Q Lifting capacity, rated load
- c Load centre (distance)

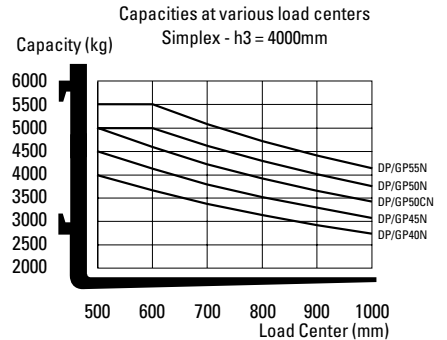

DP/GP40N - DP/GP45N					DP/GP40N PNEUMATIC		DP/GP45N PNEUMATIC		DP/GP40N SOLID PNEUMATIC		DP/GP45N SOLID PNEUMATIC	
Mast Type	h3	h1	h4	h2/h5	Q @ c = 500mm	Q @ c = 600mm	Q @ c = 500mm	Q @ c = 600mm	Q @ c = 500mm	Q @ c = 600mm	Q @ c = 500mm	Q @ c = 600mm
	mm	mm	mm	mm	kg	kg	kg	kg	kg	kg	kg	kg
Simplex	3000	2170	4130	150	4000	3500	4500	4000	4000	3500	4500	4000
	3300	2320	4430	150	4000	3500	4500	4000	4000	3500	4500	4000
	3700	2520	4830	150	4000	3500	4500	4000	4000	3500	4500	4000
	4000	2700	5130	150	4000	3500	4500	4000	4000	3500	4500	4000
	4500	3000	5630	150	4000	3500	4500	4000	4000	3500	4500	4000
	5000	3250	6130	150	3850	3500	4500	4000	4000	3500	4500	4000
	5500	3500	6630	150	3600	3400*	4300*	4000*	3700	3500	4400	4000
6000	3750	7130	150	3500*	3300*	3900*	3900*	3600	3400	4250	3900	
Duplex	3000	2170	4130	1090	4000	3500	4500	4000	4000	3500	4500	4000
	3300	2320	4430	1240	4000	3500	4500	4000	4000	3500	4500	4000
	3700	2520	4830	1440	4000	3500	4500	4000	4000	3500	4500	4000
	4100	2700	5190	1620	4000	3500	4500	4000	4000	3500	4500	4000
Triplex	3700	1950	4830	870	4000	3500	4500	4000	4000	3500	4500	4000
	4000	2050	5130	970	4000	3500	4500	4000	4000	3500	4500	4000
	4360	2170	5490	1090	4000	3500	4500	4000	4000	3500	4500	4000
	4700	2285	5830	1200	3900	3500	4500	4000	4000	3500	4500	4000
	5050	2400	6180	1320	3800	3500	4500	4000	3900	3500	4500	4000
	5500	2550	6630	1470	3600*	3400*	4200*	4000*	3700	3450	4350	4000
	6000	2750	7130	1670	3450*	3250*	4050*	3800*	3550	3300	4200	3900
	6500	2950	7630	1870	3000*	3000*	3000*	3000*	3350	3200	4050*	3800*
	7000	3150	8130	2070	2400*	2400*	2400*	2400*	3300*	3100*	3500*	3500*

DP/GP50CN					DP/GP50CN PNEUMATIC		DP/GP50CN SOLID PNEUMATIC	
Mast Type	h3	h1	h4	h2/h5	Q @ c = 500mm	Q @ c = 600mm	Q @ LC = 500mm	Q @ c = 600mm
	mm	mm	mm	mm	kg	kg	kg	kg
Simplex	3000	2250	4130	150	5000	4500	5000	4500
	3300	2400	4430	150	5000	4500	5000	4500
	3700	2600	4830	150	5000	4500	5000	4500
	4000	2850	5130	150	5000	4500	5000	4500
	4500	3100	5630	150	5000	4500	5000	4500
	5000	3350	6130	150	5000	4500	5000	4500
	5500	3600	6630	150	4750*	4500*	4850	4500
	6000	3850	7130	150	3900*	3900*	4700	4400
Duplex	2970	2250	4100	1170	5000	4500	5000	4500
	3300	2400	4410	1320	5000	4500	5000	4500
	4100	2850	5210	1770	5000	4500	5000	4500
Triplex	3700	2050	4830	970	5000	4500	5000	4500
	4040	2170	5170	1090	5000	4500	5000	4500
	4310	2260	5440	1180	5000	4500	5000	4500
	4750	2400	5880	1320	5000	4500	5000	4500
	5050	2500	6180	1420	5000	4500	5000	4500
	5500	2650	6630	1570	4700*	4450*	4800	4500
	6000	2850	7130	1770	4200*	4200*	4600	4350
	6500	3050	7630	1970	3000*	3000*	4450*	4200*
	7000	3250	8130	2170	2400*	2400*	3500*	3500*

DP/GP50N - DP/GP55N					DP/GP50N PNEUMATIC	DP/GP55N PNEUMATIC	DP/GP50N SOLID PNEU.	DP/GP55N SOLID PNEU.
Mast Type	h3	h1	h4	h2/h5	Q @ c = 600mm	Q @ c = 600mm	Q @ c = 600mm	Q @ c = 600mm
	mm	mm	mm	mm	kg	kg	kg	kg
Simplex	3000	2250	4280	160	5000	5500	5000	5500
	3300	2400	4580	160	5000	5500	5000	5500
	3700	2600	4980	160	5000	5500	5000	5500
	4000	2850	5280	160	5000	5500	5000	5500
	4500	3100	5780	160	5000	5500	5000	5500
	5000	3350	6280	160	5000	5500*	5000	5500
	5500	3600	6780	160	4900*	(4650)*	5000	5500
	6000	3850	7280	160	4100*	(3450)*	4900	5350*
Duplex	3000	2250	4250	1030	5000	5500	5000	5500
	3300	2400	4560	1180	5000	5500	5000	5500
	4100	2850	5360	1630	5000	5500	5000	5500
Triplex	3700	2050	4980	830	5000	5500	5000	5500
	4040	2170	5320	950	5000	5500	5000	5500
	4310	2260	5590	1040	5000	5500	5000	5500
	4750	2400	6030	1180	5000	5450	5000	5500
	5050	2500	6330	1280	5000	5500*	5000	5500
	5500	2650	6780	1430	4900*	(4850)*	5000	5500
	6000	2850	7280	1630	4300*	(3500)*	4800	5300*
	6500	3050	7780	1830	3150*	(2600)*	4650*	(4400)*
	7000	3250	8280	2030	2500*	(2000)*	3900*	(3050)*

* Truck equipped with dual tyres. Consult your dealer for maximum back-tilt allowed, to obtain the capacities specified.

(l) Capacities shown in brackets for the 5.5 tonnes model show lower capacities compared to 5.0 tonne model.

info@catliftruck.com

www.catliftruck.com

CESC1043(02/10)ok

Copyright ©2010, MCFE. All rights reserved.

CATERPILLAR, CAT, their respective logos,

'Caterpillar yellow' and the 'Power Edge' trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

Printed in the Netherlands.

NOTE: Performance specifications may vary depending on standard manufacturing tolerances, vehicle condition, types of tyres, floor or surface conditions, applications, or operating environment. Trucks may be shown with non-standard options. Specific performance requirements and locally available configurations should be discussed with your Cat lift trucks Dealer. Cat Lift Trucks follows a policy of continual product improvement. For this reason, some materials, options and specifications could change without notice.

